



(11) Publication number: **0 622 931 A2**

(12)

# EUROPEAN PATENT APPLICATION

(21) Application number: **94301826.7**

(51) Int. Cl.<sup>5</sup>: **H04L 29/06, H04L 12/18**

(22) Date of filing: **15.03.94**

(30) Priority: **19.03.93 US 34313**

(43) Date of publication of application:  
**02.11.94 Bulletin 94/44**

(84) Designated Contracting States:  
**DE FR GB**


(71) Applicant: **AT & T GLOBAL INFORMATION SOLUTIONS INTERNATIONAL INC.**  
**1700 South Patterson Boulevard**  
**Dayton, Ohio 45479 (US)**

(72) Inventor: **Schwartz, Krista S.**  
**953 Jennifer Drive**  
**Batavia, IL 60510 (US)**  
Inventor: **Carleton, Allison A.**  
**1425 Leavitt**  
**Chicago, IL 60622 (US)**  
Inventor: **FitzPatrick, Catherine M.**  
**953 Jennifer Drive**  
**Batavia, IL 60510 (US)**  
Inventor: **Pommier, Theresa M.**  
**126 S. Wilmette**  
**Westmont, IL 60559 (US)**

(74) Representative: **Robinson, Robert George**  
**International Patent Department**  
**NCR Limited**  
**915 High Road**  
**North Finchley**  
**London N12 8QJ (GB)**

(54) Display annotation for computer collaboration system.

(57) In a computer system including a plurality of interlinked computers, annotations made on the display of one computer are replicated on the displays of the other computers. The annotations may be made in a shared window which is a display for an application program running on one of the computers.

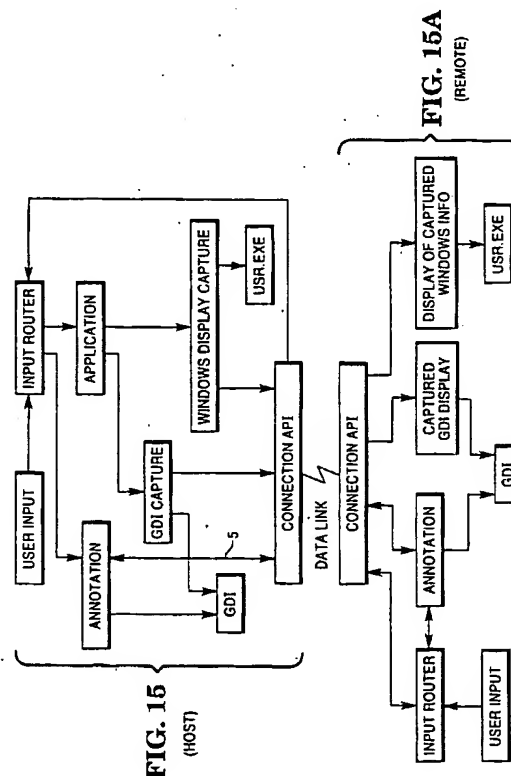

EP 0 622 931 A2

BEST AVAILABLE COPY

This invention relates to operating a plurality of interlinked computers.

Modern telephone systems allow multiple parties at different locations to hold a conference. However, telephone conferences do not provide all of the conveniences of a face-to-face conference, where participants all meet at a common table in a meeting room. For example, in a meeting room, participants can view an object of interest, such as a drawing or a product. Such viewing is not possible in a telephone conference.

It is an object of the invention to provide an improved electronic conferencing system.

Therefore, according to the present invention, there is provided a method of operating a computer system, including a plurality of interlinked computers, characterized by the steps of: running a message-driven operating system on each computer; and when any user of a computer generates a message of a pre-determined type, replicating the message at the other computers.

One embodiment of the present invention will now be described by way of example, with reference to the accompanying drawings, in which:-

Figure 1 illustrates three computers, connected by telephone lines.

Figure 2 initiates an example, which will be elaborated in Figures 3-14. In the example, a calculator program is operated, and annotated, by various parties.

Figure 3 illustrates how the system responds when a host user attempts to operate the calculator, in Annotation mode.

Figure 4 illustrates how the system responds when a host user attempts to annotate the calculator, in Annotation mode.

Figure 5 illustrates how the system responds when a host user attempts to operate the calculator, in Application mode.

Figure 6 illustrates how the system responds when a host user attempts to operate the calculator, in Local Annotation mode.

Figure 7 illustrates how the system responds when a host user attempts to annotate the calculator, in Local Annotation mode.

Figure 8 illustrates how the system responds to a host user when in View mode.

Figure 9 illustrates how the system responds when a remote user attempts to operate the calculator, in Annotation mode.

Figure 10 illustrates how the system responds when a remote user attempts to annotate the calculator, in Annotation mode.

Figure 11 illustrates how the system responds when a remote user attempts to operate the calculator, in Application mode.

Figure 12 illustrates how the system responds when a remote user attempts to operate the calculator, in Local Annotation mode.

Figure 13 illustrates how the system responds when a remote user attempts to annotate the calculator, in Local Annotation mode.

Figure 14 illustrates how the system responds to a remote user when in View mode.

Figure 15 and 15A illustrate logic flow used by the system.

Figure 1 shows three computers connected by telephone links. Each computer runs a message-driven, multi-tasking, Graphical User Interface (GUI), such as that sold under the name Windows, available from Microsoft Corporation, located in Redmond, Washington. Such GUIs are also called operating environments.

The user of a GUI interacts with a program by way of windows. Selected windows, rather than the entire display, are replicated at the remote computers. This selective replication allows users to maintain private areas on their displays, which are not shared. Each computer also runs software which effects the operations described herein. In addition, one computer (the Host) runs an Application program. (It is possible for the Host to run both programs because of the multi-tasking capabilities of the GUI.)

There are four basic modes of operation:

## 1. Application Mode

Any user of any of the three computers in Figure 1 can issue commands to the Application program. For example, assume the Application program is one which simulates a hand-held calculator. The initial situation is shown in Figure 2, where each computer display shows the calculator. Assume that the following events occur:

The user of the Host presses the "3" button on the calculator (either by keyboard input, or mouse input, depending upon the design of the calculator program).

In response, each calculator, in its display area, shows a "3".

The user of one Remote presses "+".

The user of the other Remote presses "6".

The user of the Host presses "=".

At this point, all calculators will display "9", which is the sum of 3 and 6. The users collectively operated the calculator program, and the display of each shows the result.

The calculator program does not care which users pressed the buttons, nor whether some users pressed no buttons, provided a legal sequence of buttons was received. (It is assumed that the users are cooperative, and that no users try to sabotage operation of the calculator.)

## 2. Annotation Mode

Any user can draw on the user's own, local, dis-

play, using drawing tools similar to those found in a "paint" program. The user can draw boxes, circles, arcs, text, ellipses, and so on. The user can also erase items on the display.

The user's annotations are replicated on all other displays, so that all users view similar displays. However, the displays could be different, because of the following factors:

(A) Different display monitors have different properties, such as resolution and color capability.

(B) Different display protocols (EGA, VGA, etc.) represent graphics images differently, and have different color capabilities.

(C) Different GUIs, or different versions of the same GUI, may have different display conventions. Different computers in Figure 1 could run the different GUIs.

(D) Some users have changed the size of the window in which their calculator is displayed, causing a deviation in scaling.

These differences can cause differences in the appearance of the displayed images, relative to each other, but the basic content of all displays should be the same. To accommodate size differences, the displays may be drawn to different scales as appropriate.

### 3. Local Annotation Mode

A user can annotate the local display, but the annotations are kept private, and no other user can see the annotations.

### 4. View Mode

No users can annotate, nor can they issue commands. However, an action resembling annotation can be taken. Users can move their cursors, and others will see the movement, allowing remote pointing. View Mode is useful in one embodiment, wherein, for example, Annotate Mode is in force, but a specific user's mode is designated as View. In this embodiment, all users can annotate, but the "View" user can only watch, and cannot annotate.

Figures 3-14 will illustrate the different modes, by way of example, using the calculator program.

Referring to Figure 3, there is shown the situation where the host runs on application program; the mode is "Annotation"; the user input is at the host computer; and the user attempts to operate the calculator.

Assume that the user of the host computer attempts to add two numbers, using the calculator. Attempted entry of the first number will be considered.

The user, located at the Host, moves the Host's cursor over a key of the calculator, as shown in Figure 3, and tries to depress the key, by clicking the mouse. However, the mouse click is blocked and does not

reach the Application program. The Application program does not respond, because it receives no mouse click.

That is, in more detail, the GUI detects the mouse movement, and causes "mouse messages" to be generated. The GUI places the mouse messages into a queue, where they await processing. INPUT ROUTER in Figure 15 reads these messages. Because "Annotation Mode" is currently in force, INPUT ROUTER directs the messages to ANNOTATION block. APPLICATION does not receive the messages and thus does not respond. The mouse click is ignored.

ANNOTATION can be configured to respond to two (or more) ways to the mouse messages. In one configuration, annotation requires the mouse to initially select an ANNOTATION TOOL. If no selection is done, ANNOTATION ignores mouse messages.

Selection is done by clicking the mouse over an image of the tool, as is commonly done in "paint" programs. ANNOTATION recognizes this tool selection, and then treats subsequent mouse clicks as data for drawing with the selected tool. For example, if a rectangle tool were selected, the next two mouse clicks would define the diagonal corners of the rectangle. (Figure 4, later discussed, illustrates drawing a rectangle.)

Under the second configuration, a default tool, such as a pen, is automatically selected when in Annotation Mode. In this configuration, when the user tries to depress a calculator button (by clicking on it), the user (unintentionally) initiates drawing of a line, using the pen. When the user recognizes this, the user can terminate drawing of the line, in any of several known ways.

Therefore, in Annotation Mode, the system either (a) responds to mouse input by initiating a draft annotation, or (b) ignores the mouse input, because an annotation tool was not selected. Keyboard input from the user is treated the same way. Of course, other responses by ANNOTATION can be designed.

Each display shows a cursor whose position is controlled by the associated mouse. Each cursor is replicated on all displays. Thus, in Figure 3, with three mice, there are three cursors on each display (only one is shown for simplicity). Consequently, when one user moves a mouse, the corresponding cursor moves on all displays. In general, the three cursors are distinguishable: each cursor identifies its owner, as by color, shape, inclusion of a label, or the like.

Referring to Figure 4, there is shown the situation where the host runs an application program; the mode is "Annotation"; the user input is at the host computer; and the user attempts to draw a box over the calculator.

This situation is quite similar to that of Figure 3, except that, now, the user intends to draw an annotation, instead of intending to press a button, as in Figure 3.

Assume that the user of the host computer draws a box over the calculator. (The box is shown overly large, for emphasis. It is preferred that the box not extend beyond the calculator itself.) The box is replicated on the remote computers. (The box is drawn using annotation tools, which are not shown.)

In terms of Figure 15, INPUT ROUTER directs the logic flow to ANNOTATION. ANNOTATION call the proper GDI functions to draw the box. Also, ANNOTATION sends "annotation messages" to CONNECTION API, which delivers the annotation messages to the Remotes.

ANNOTATION in Figure 15A receives the annotation messages. This ANNOTATION block represents the logic executed at each remote computer. This ANNOTATION calls the proper GDI functions, via the block GDI.

"GDI" is an acronym for Graphical Device Interface. "GDI functions" are small programs, contained in a larger program of the GUI called GDI.EXE. A GDI function, when called, draws a specific graphic image, such as a circle, box, or text, based on subsequent input from the user. Other GDI functions perform other tasks, such as selecting pen widths.

GDI.EXE is a commercially available product. Technical details concerning GDI.EXE are contained in "Windows Software Development Kit," available from Microsoft Corporation, and in Programming Windows 3.1 by Charles Petzold (Microsoft Press, Redmond, Washington, 1992, ISBN 1-55615-395-3).

Referring to Figure 5, there is shown the situation where the host runs an application program; the mode is "Application"; the user input is at the host computer; and the user attempts to use the calculator.

The user of the Host moves the cursor over the calculator key "3" and clicks the mouse. The GUI generates a mouse message and places it into the queue. The mouse message is read, and passed to the Application program (ie, the calculator program), which responds by (1) showing that the key "3" is depressed and (2) drawing the numeral "3" in the calculator's display, using GDI calls. The Application program also records the fact that the user enters a "3", for its own internal operations.

The GDI calls made by the Application program in drawing the "3" in the calculator, and in drawing the depressed "3" button are intercepted, and notified to the other computers. The other computers replicate the Host display, by executing the same GDI functions. Greater detail concerning this GDI interception is given later.

Thus, all users simultaneously see the user of the Host operate the calculator. (The action is not exactly simultaneous, because extremely short delays are involved. However, a human probably could not detect the delays if the Host and the Remote were operating side-by-side.)

In terms of Figure 15, the INPUT ROUTER recognizes that the mouse messages should be directed to the Application program, and directs the logic flow to APPLICATION (ie, the calculator program). APPLICATION (1) draws a depressed "3" key and (2) writes the numeral "3" on the calculator's display, by calling appropriate GDI functions.

However, the system, via GDI CAPTURE in Figure 15, captures the Application program's GDI calls, before they are executed. Two things are done with the captured calls. One, the other computers are notified of these calls, via the block CONNECTION API. This action leads to block CAPTURED GDI DISPLAY in Figure 15A, which causes each Remote to execute the same GDI functions, as indicated by block GDI. Two, the system allows the GDI functions, called by the Application program, to be executed at the host, via the block GDI in Figure 15. Therefore, GDI function calls made by the Application Program are captured and notified to the Remote computers, so that the Remotes can duplicate them. The captured calls are then executed as intended on the Host.

Referring to Figure 6, there is known the situation where the host runs an application program; the mode is "Local Annotation"; the user input is at the host computer; and the user attempts to operate the calculator.

Assume that in Annotation Mode, there is no default annotation tool given to the user. Under this assumption, if the user moves the cursor to a calculator button, and tries to "press" the button, the INPUT ROUTER in Figure 15 passes the mouse message to the annotation block. Since the mouse click is not part of a valid annotation input sequence (no tool was selected), ANNOTATION draws nothing. Further, the Remote computers do not show the movement of the cursor corresponding to the Host computer's mouse, as indicated, because line 5 in Figure 15 does not send Annotation Messages to the other computers when Local Annotation is in force. Further still, the calculator button is not redrawn as a depressed button on the Host display, in response to the attempt to press it, because APPLICATION did not receive the mouse message. APPLICATION is responsible for drawing depressed calculator buttons.

If a default annotation is assigned to the user in Local Annotation Mode, the user's mouse click would initiate drawing by that tool. When the user realized the mistake, the user would terminate the drawing, in a known manner.

Referring to Figure 7, there is shown the situation where the host runs an application program; the mode is "Local Annotation"; the user input is at the host computer; and the user attempts to annotate the calculator. Under these conditions, the INPUT ROUTER in Figure 15 recognizes a valid attempt to perform annotation, as by drawing a box. The INPUT ROUTER directs the logic flow to the ANNOTATION block, which calls the proper GDI functions for drawing the

annotation, namely, a box, as shown in Figure 7. However, because the annotation is local, no boxes are drawn on remote computers, as indicated in Figure 7. No data is sent along data path 5 in Figure 15.

Referring to Figure 8, there is shown the situation where the host runs an application program; the mode is "View"; the user input is at the host computer; and the user attempts to operate the calculator. As Figure 8 indicates, the mouse click is ignored, and nothing happens at the Remotes. In Figure 15, the INPUT ROUTER reads the mouse message, but blocks it from APPLICATION, because the current mode is "view."

Referring to Figure 9, there is shown the situation where the host runs an application program; the mode is "ANNOTATION"; the user input is at a remote computer; and the user attempts to operate the calculator.

Assume that the user moves the mouse cursor over a calculator button and clicks the mouse. The mouse click is ignored. The other computers (Host and the other Remote) show the motion of the user's cursor, but nothing else, because no tool has been selected. In Figure 15A, the INPUT ROUTER blocks the mouse message from reaching APPLICATION. The logic is directed to ANNOTATION, which draws a cursor on the user's Remote display, via block GDI. ANNOTATION also sends data to CONNECTION API, which directs the logic to ANNOTATION in Figure 15. This ANNOTATION represents the annotation logic present on the two other computers: the Host and the other Remote. These ANNOTATION blocks draw cursors corresponding to the users cursor, at corresponding positions, via the GDI block in Figure 15, which represents GDI function calls. The Host can use one tool, such as a box-drawing tool, while a Remote can use a different tool, such as a circle-drawing tool.

Referring to Figure 10, there is shown the situation where the host run an application program; the mode is "ANNOTATION"; the user input is at a remote computer; and the user attempts to annotate the calculator. Assume that the annotation is a box. A box is drawn on all displays. In Figure 15A, the INPUT ROUTER at the user's Remote directs the mouse messages to the block ANNOTATION. ANNOTATION does two things. One, it calls the proper GDI functions to perform the annotation, namely, drawing the box. Two, ANNOTATION sends annotation messages to CONNECTION API, which delivers the annotation messages to the other computers. However, one of these is the Host, and the other is a Remote. The logic at the Host reaches ANNOTATION in Figure 15, and the logic at the other Remote reaches ANNOTATION in Figure 15A.

Both of these ANNOTATION blocks cause the proper GDI functions to be called, to draw an annotation corresponding to the user's annotation. However, in the Host, logic path 5 is not taken at this time, be-

cause it is not necessary to replicate the Host's annotations at other computer.

Referring to Figure 11, there is shown the situation where the host runs an application program; the user input is at a remote computer; and the user attempts to operate the calculator. It will be recalled that the calculator program is loaded only on the host, while a Remote user wishes to operate it.

The Remote user's INPUT ROUTER in Figure 15A routes the mouse messages to CONNECTION API. The Host receives these messages, which are delivered to the Host's INPUT ROUTER in Figure 15. The Host's INPUT ROUTER directs the messages to the block APPLICATION (ie, to the Application program, namely, the calculator program), which does two important things.

The calculator program treats the messages as though they were issued by the Host's mouse, even though a Remote mouse caused them. The calculator program responds in its usual way, which includes (1) showing a depressed calculator button "3", (2) writing the numeral "3" in the calculator's display, and (3) performing its own internal computations when it learns that the user entered data (namely, the "3").

However, before the calculator program can execute (1) and (2) in the previous paragraph, the system first captures the GDI functions which the calculator program calls. This capture is illustrated in block GDI CAPTURE in Figure 15. During this capture, the system, in effect, does two things. One, it sends these GDI functions to CONNECTION API (for the other computers to use). At the user's Remote, CONNECTION API in Figure 15A directs the GDI functions to CAPTURED GDI DISPLAY, which replicates the Host's display. Two, it causes the GDI functions to be executed at the Host (via block GDI in Figure 15). Therefore, the general sequence of events is the following:

The Remote user attempts to press a calculator button.

The software running on the Remote detects this attempt, and sends data to the calculator program running on the host. The data takes the form of messages which the calculator program "thinks" come from the Host's mouse.

The calculator program performs as usual, and draws images on the Host display, via GDI calls.

The system captures the GDI calls, and informs the Remotes of them.

The Remotes replicate the Host's window. The Remote user thus can remotely operate the calculator program running on the Host.

Summarizing in a different way: mouse messages are generated at the Host, based on mouse messages at the Remote. The calculator program (running on the Host) responds to the mouse messages as though they were generated at the Host. The GDI calls made by the calculator program are intercepted,

and executed at the Remote, thereby replicating the Host's display at the Remote.

Referring to Figure 12, there is shown the situation where the host runs an application; the mode is "Local Annotation", the user input is at a remote computer, and the user attempts to operate the calculator. The user's mouse click is ignored. Nothing appears on the other displays in response to the mouse movement, because of failure to select a tool.

Referring to Figure 13, there is shown the situation where the host runs an application program; the mode is "Local Annotation"; the user input is at a remote computer; and the user attempts to annotate the calculator. The annotation is drawn on the user's display, as indicated. No annotation occurs on the other displays.

Referring to Figure 14, there is shown the situation where the host runs an application program; the mode is "View"; the user input is at a remote computer; and the user attempts to operate the calculator. As indicated, the mouse cursor moves at the user's display, but the mouse click is ignored. Further, the other two displays show the movement of the user's mouse cursor.

With regard to the above situation descriptions, the following points should be noted. The displays are drawn using GDI functions. However, different parts of a display are drawn by different programs.

Despite the fact that all these drawing operations are undertaken using GDI functions GDI functions are not the exclusive medium of communication between computers for replicating the displays. For example, when a user performs annotation, the user's mouse messages are replicated, as messages, at the other computers, via path 5 in Figure 15. These replicated messages then cause the respective ANNOTATION blocks (at the other computers) to issue the proper GDI calls for drawing the annotation. That is, GDI calls are not sent directly from the user performing the annotation to the other computers.

In contrast, when an application program causes a graphic image to be drawn on a display, GDI calls are intercepted via GDI CAPTURE in Figure 15) and caused to be replicated on the other computers.

A major reason for the two different procedures (replicating mouse messages and replicating GDI calls) is that annotations are stored in memory at different locations than the display information. That is, returning to the calculator of Figure 2, the Application program stores the image of the calculator in the following general way. Annotation data is stored. Application program data is stored by the Application program (at the host). Each image of a key is stored as data from which a GDI function can draw the key. The data includes information such as position, size, color, and so on. Each key includes an associated number. The number can be stored as a text character, with information as to position, size, font type, and so

on. Annotation data is stored at a different location, but in the same general way. If either the annotation or the Application program needs bitmaps, the bitmaps are stored in a conventional, known manner, by the GUI.

The annotation images are combined with the Application's images by the known technique of masking. That is, at a Remote, the received GDI functions are executed into a bitmap. The received annotation information is executed into a different bitmap. The two bitmaps are masked together. The annotation data is kept separate from the application data so that, for example, a user can save an Application image, but without annotations. Alternatively, a user can save annotation data alone, or save an annotated display.

As another example, keeping the annotation data separate facilitates drawing a display having no annotation data. If the annotation data were intermingled with the calculator image data, elimination of the annotation data would be difficult, if not impossible. If GDI calls were transmitted exclusively (ie. no message replication were undertaken), then extra effort would be required to construct annotation data for separate storage.

GDI interception can be understood as follows.

A. On start-up, the first five bytes of each GDI function are replaced with a JUMP instruction to a particular program, namely, Trap.GDI.

B. Trap.GDI gets the parameters for the desired graphics image (eg. in the case of a box, the locations of the two diagonal corners) and calls the sub-program PkgDispCall. Trap.GDI also replaces the first five bytes.

C. PkgDispCall accepts the parameters from Trap.GDI and generates an object structure. This object structure is a block of data containing everything necessary for the other computers to draw the box.

For example, the object structure contains information as to size and position of the box. Further, the GUI draws images within a "context". The context includes things such as pen width, color, and other features. The contexts of the individual computers are tracked. If the context of the box drawn is different from the contexts of the remote computers, PkgDispCall includes data necessary for the other computers to create the correct contexts.

D. The object structure is shipped to the other computers, which then execute the same GDI functions.

E. The invention executed the original GDI functions.

The displays are not replicated bit-by-bit. For example, the image of the calculator in Figure 2 could be transferred between computers in bitwise fashion. If the calculator occupied a space of 200 x 300 pixels, then information regarding 60,000 (ie. 200 x 300) pix-

els must be sent.

Instead, the particular calculator image shown in Figure 2 is treated as eighteen rectangles, plus a text character for each of sixteen of the rectangles, giving a total of 34 objects. Each object requires parameters, such as size and position. The number of parameters is small, in the range of three to ten. Assuming ten parameters, then 340 pieces of data must be sent. Of course, the size of each piece depends on many factors, but a small number of bytes for each piece may be assumed.

Therefore, the 60,000 pieces of data needed for bitwise replication once reduced to 340 pieces maximum for object replication. Of course, some objects may take the form of bitmaps, and must be sent bit-by-bit. However, in general, bitmaps are expected to be rare. Further, it is expected that, in general, bitmaps, when sent, need be sent only once. Also, the object data is compressed when possible. That is, every transmission between computers is of compressed data, when possible. Compression is known in the art.

Communication among computers can take several forms. Commercially available networks, local and wide area, can be used. Commercially available ISDN telephone service, provided by local telephone companies, can be used. Modem communication can be used. There are commercially available packages which detect messages generated by the GUI in response to an input device. One such package is WIN-SIGHT, available from Borland International.

An alternative approach to the graphics capture described above is the following. The system-provided GDI is replaced by a separate procedure which processes GDI calls before calling the actual system GDI. The system GDI name is changed to prevent confusion between the two modules. The same technique is also used on USR.EXE to also capture GDI calls made through system-provided modules.

A given computer can act as a Host for one program and a Remote for another. For example, one computer can run a word processing program. Another computer can run a CAD drawing program. Each is Host for its respective program.

Since the software on each computer is identical, or substantially identical, all users can run either the word processing program or the CAD program, in the manner described above.

There are two types of "cursor". Each GUI generates its own "real" cursor. The real cursor is not generated by GDI functions, but by an independent function in the GUI. The reader can view the cursor as a bitmap which the GUI moves in response to mouse motion.

In addition to the real cursor, which is controlled by the local mouse, the system generates a "pseudo" cursor for each remote participant. The pseudo cursors are generated using GDI functions.

Sometimes a real cursor changes shape as the cursor moves. For example, it can take the form of an arrow when lying on a tool bar, and then change to a hand when lying on a client area. Sometimes this change is under the control of the Application program. Therefore, if Remote user is controlling an Application program running on a Host machine (as in Figure 11), the Application program may change the cursor on the Host machine, but without using GDI calls. Consequently, the GDI capture of Figures 15 and 15A will be ineffective to replicate the changes on the Remote display.

To confront this problem, the system watches for the functions which change the real cursor (eg. the SetCursor command). The cursor change is replicated on the Remote computer. One way is to execute the same SetCursor command. An alternative approach would be to change the Remote cursor by executing a proper sequence of GDI calls, or to draw a bitmap, when the Host cursor changes.

It should be understood that the system only replicates windows which the user of a display identifies. That is, the user can keep a workspace, such as a notepad, private during a conference. GDI calls use a task handle. If the task handle does not refer to a shared item, the GDI calls are not shared.

## Claims

1. A method of operating a computer system, including a plurality of interlinked computers, characterized by the steps of: running a message-driven operating system on each computer; and when any user of a computer generates a message of a predetermined type, replicating the message at the other computers.
2. A method according to claim 1, characterized by the steps of capturing parameters indicative of the location of a cursor image at one of said computers; sending the parameter to the other computers; and generating a cursor image on the other computers, based on the parameters.
3. A method of operating a computer system according to any one of the preceding claims, characterized by the steps of drawing a graphic image on a display of one of the computers, in response to messages; transmitting similar messages to other computers; and causing said graphic image to be displayed at the other computers.
4. A method according to any one of the preceding claims, characterized by the steps of displaying visual data in windows of the displays of said computers; replicating at least one window in all of said displays; and allowing a user to prevent

replication of a selected window on the user's display.

5. A method according to any one of the preceding claims, characterized by the steps of running an application program on one of said computers acting as a host computer and allowing a selected remote computer to issue commands to said application program.
6. A computer system for carrying out a method according to any one of the preceding claims, including a plurality of interlinked computers, and control means adapted, when any user of a computer generates a message of a predetermined type, to replicate the message at the other computers.

5

10

15

20

25

30

35

40


45

50


55



FIG. 1

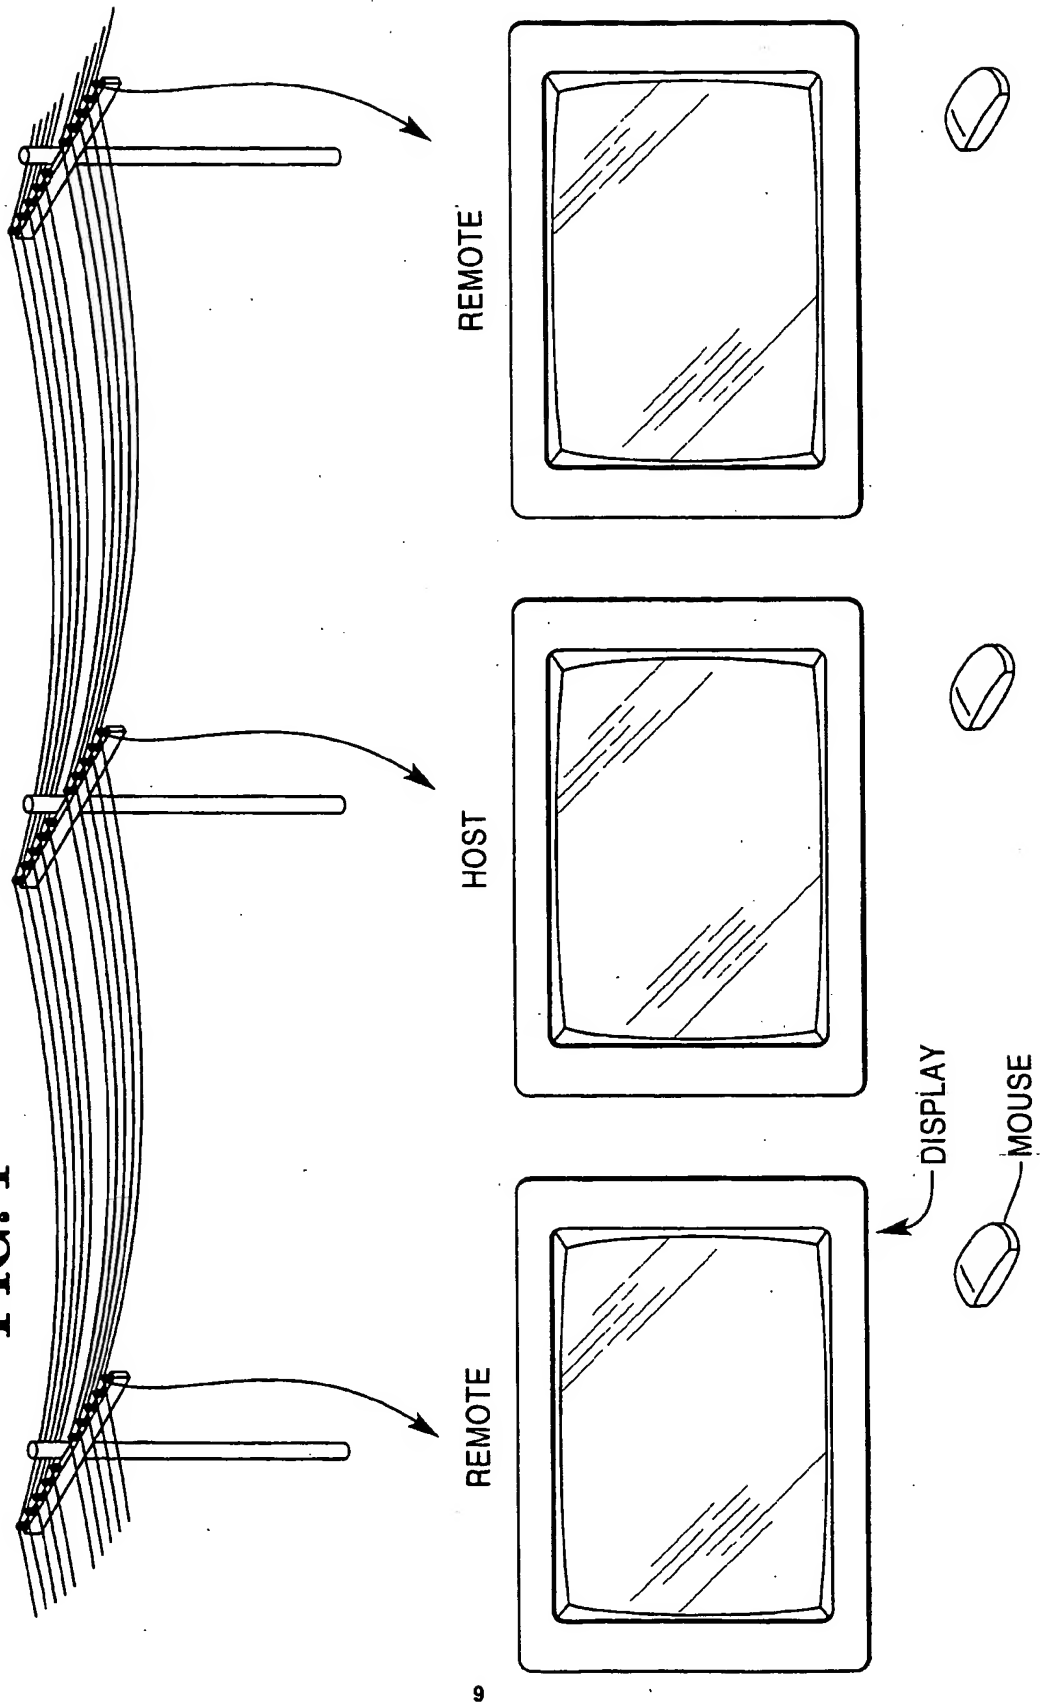

**FIG. 2**

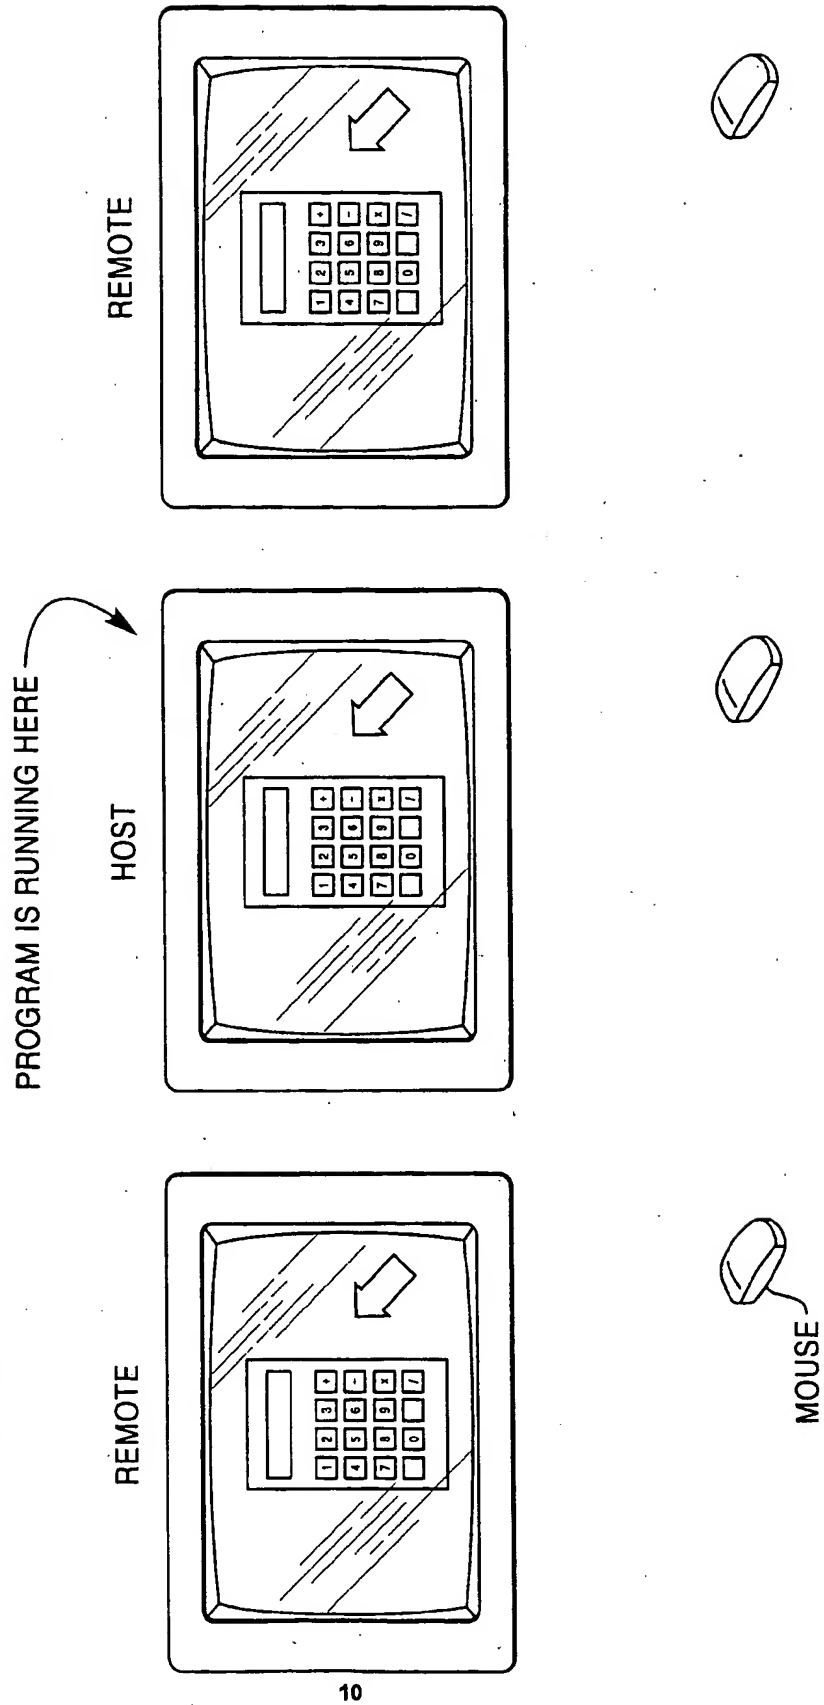





**FIG. 3**

MODE: ANNOTATION

CALCULATOR PROGRAM  
DOES NOT SEE  
MOUSE CLICK

COPY OF HOST'S  
CURSOR LOOKS  
DIFFERENT ON REMOTES

COPY OF HOST'S  
CURSOR MOVES

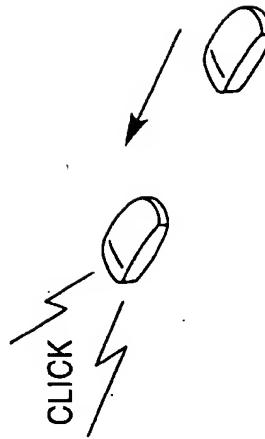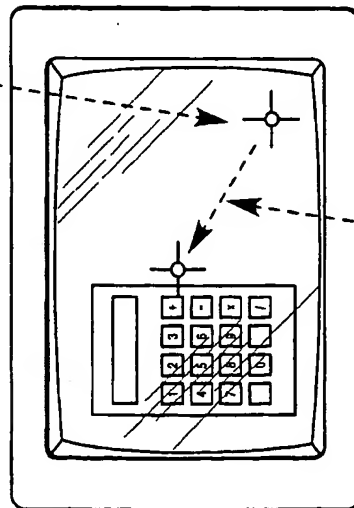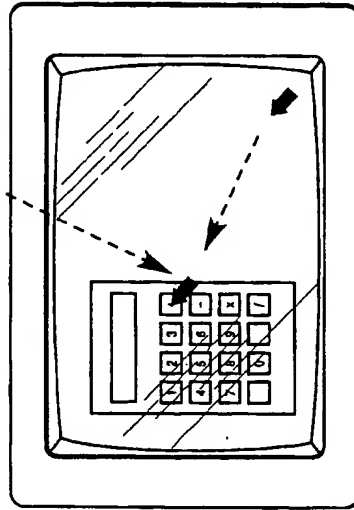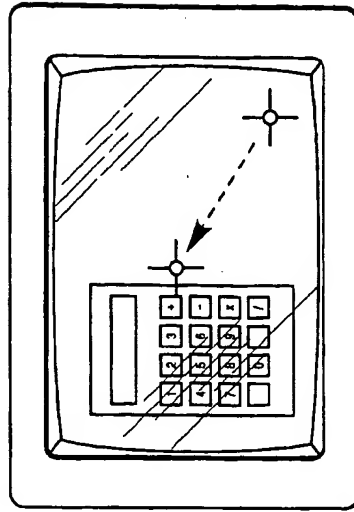


REMOTE

HOST  
PROGRAM IS RUNNING HERE

REMOTE

**FIG. 4**

MODE: ANNOTATION




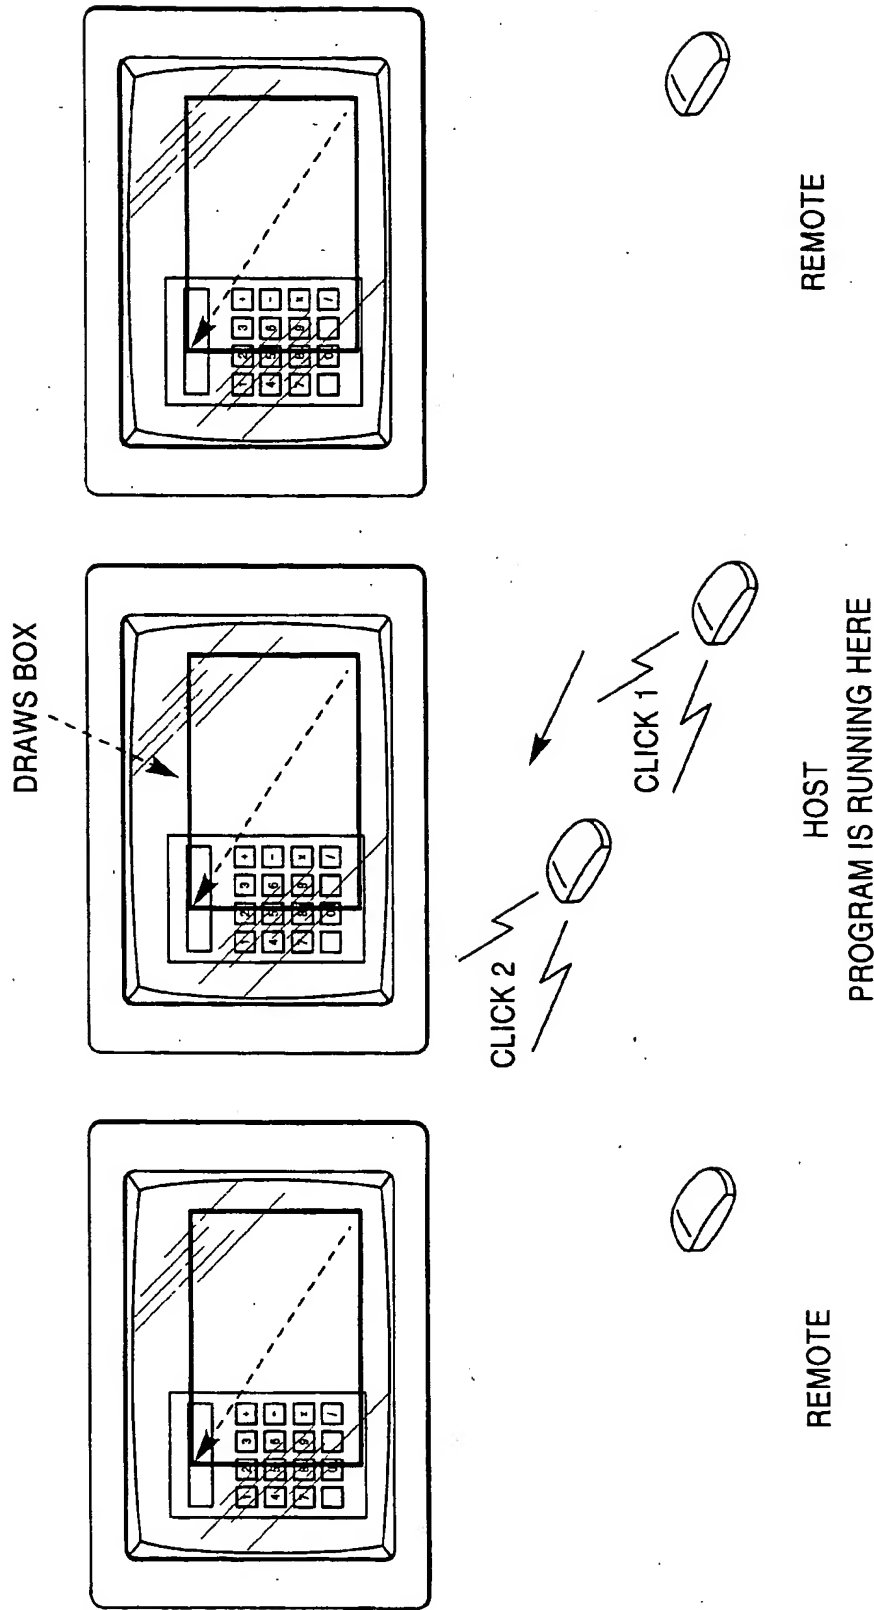


**FIG. 5**

MODE: APPLICATION

CALCULATOR  
BEHAVES NORMALLY

HOST SCREEN IS  
COPIED TO REMOTES

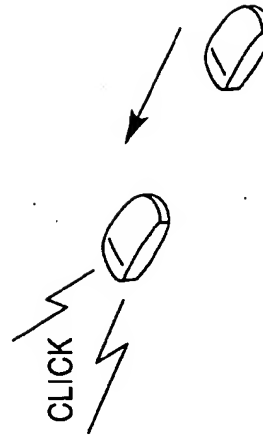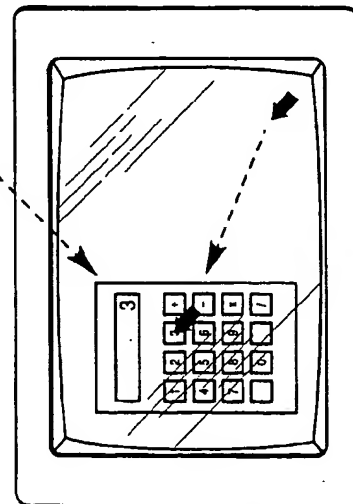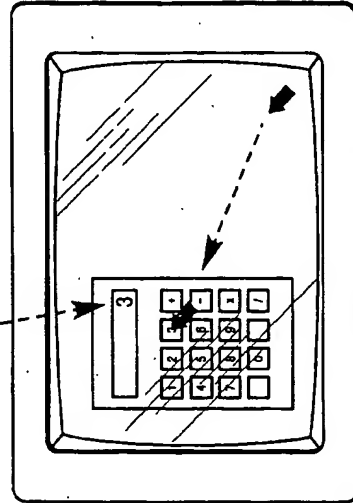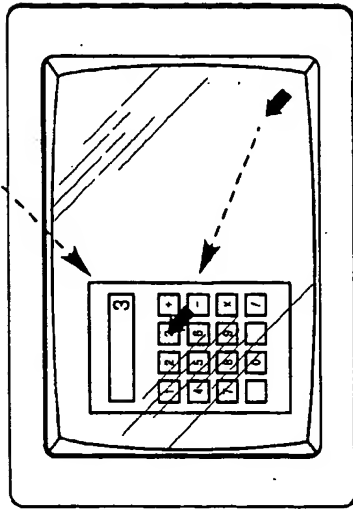

REMOTE





HOST  
PROGRAM IS RUNNING HERE

REMOTE

**FIG. 6**

MODE: LOCAL ANNOTATION

MOUSE CLICK  
IS IGNORED

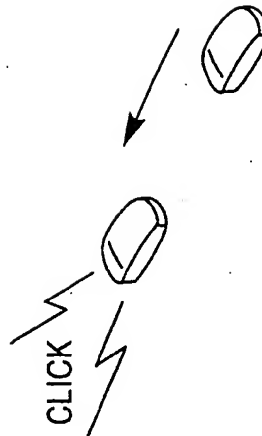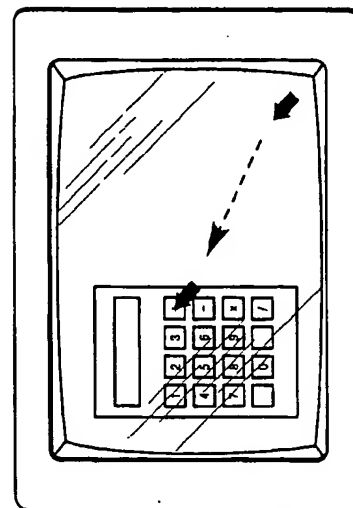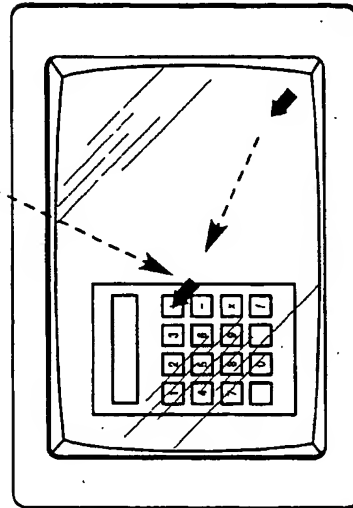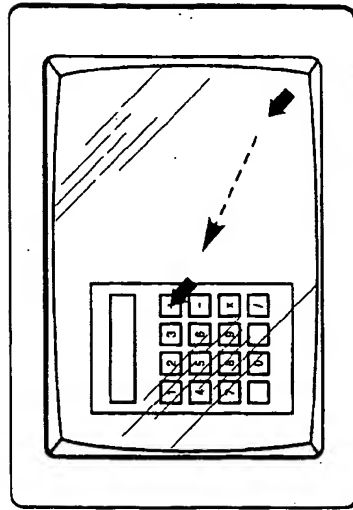


REMOTE

HOST  
PROGRAM IS RUNNING HERE

REMOTE





**FIG. 7**

MODE: LOCAL ANNOTATION

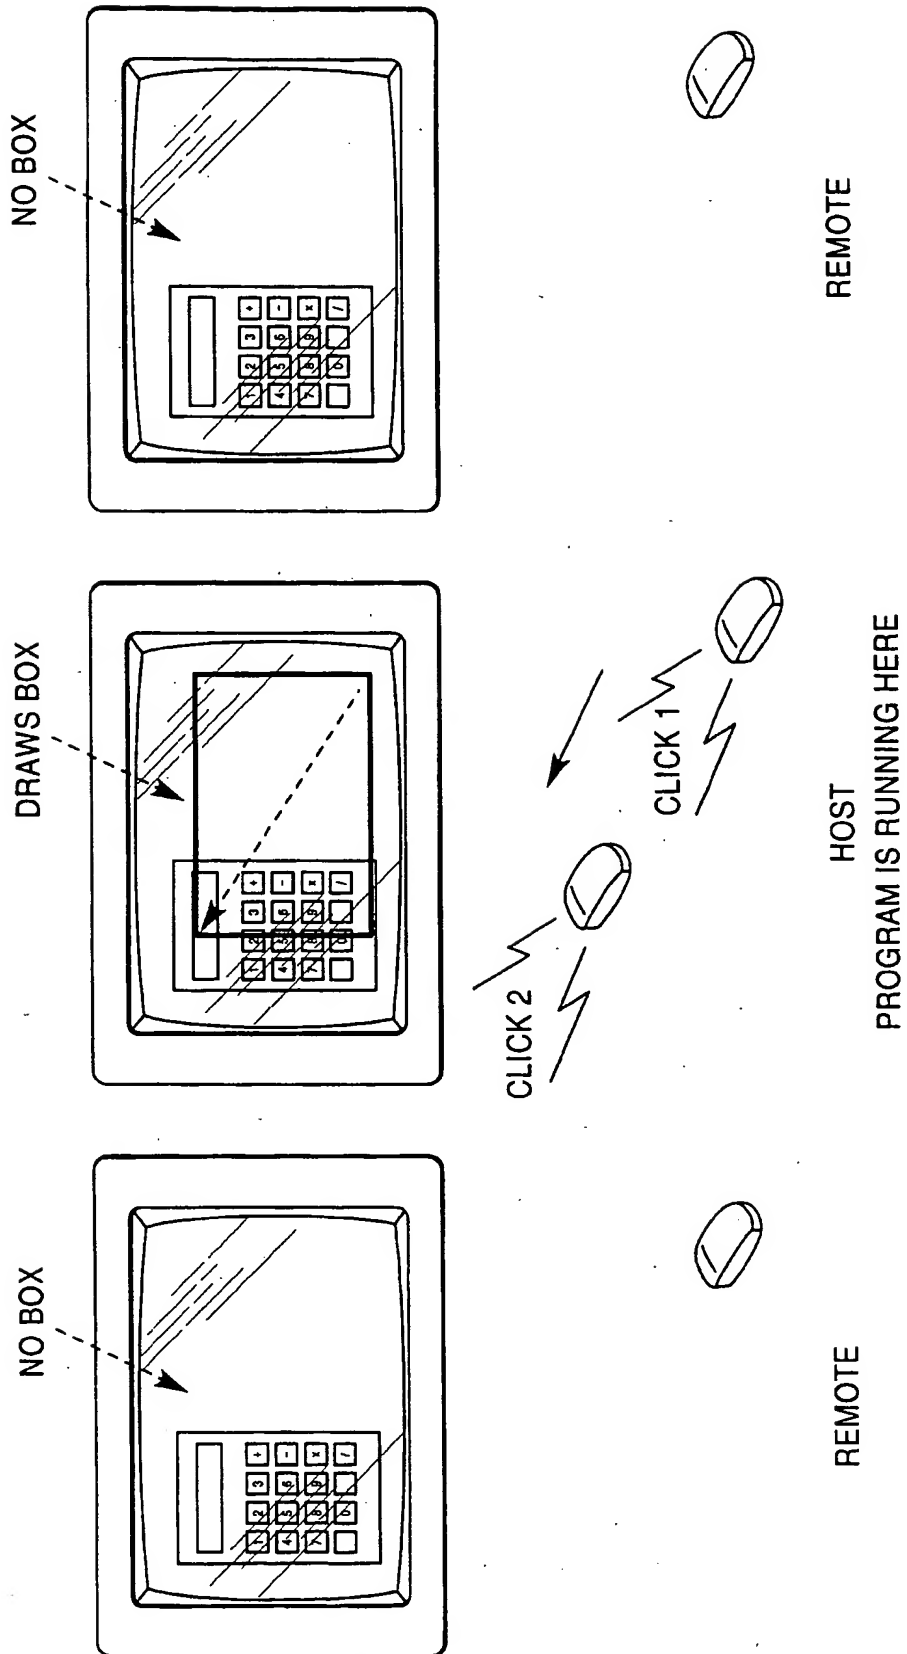

**FIG. 8**  
MODE: VIEW

MOUSE CLICK  
IS IGNORED

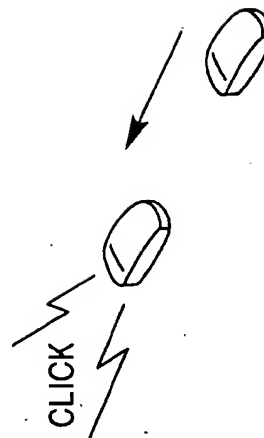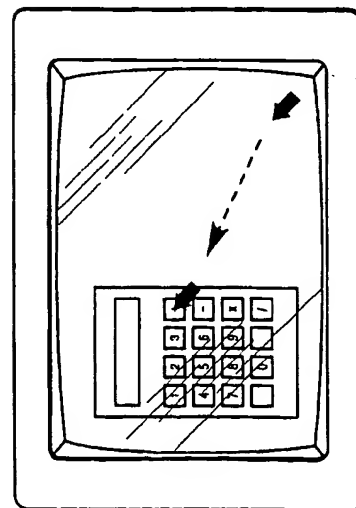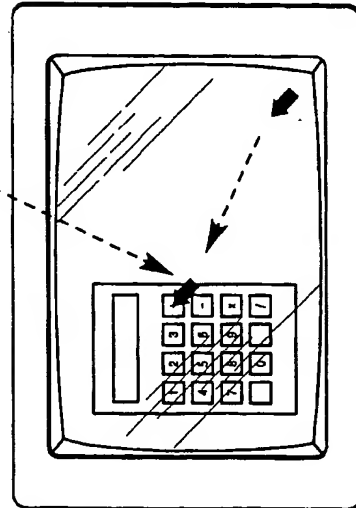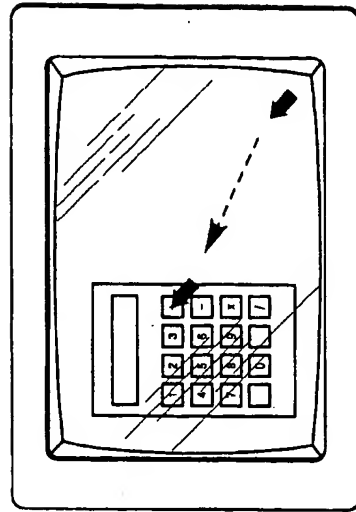

REMOTE



HOST

PROGRAM IS RUNNING HERE




REMOTE




**FIG. 9**

MODE: ANNOTATION

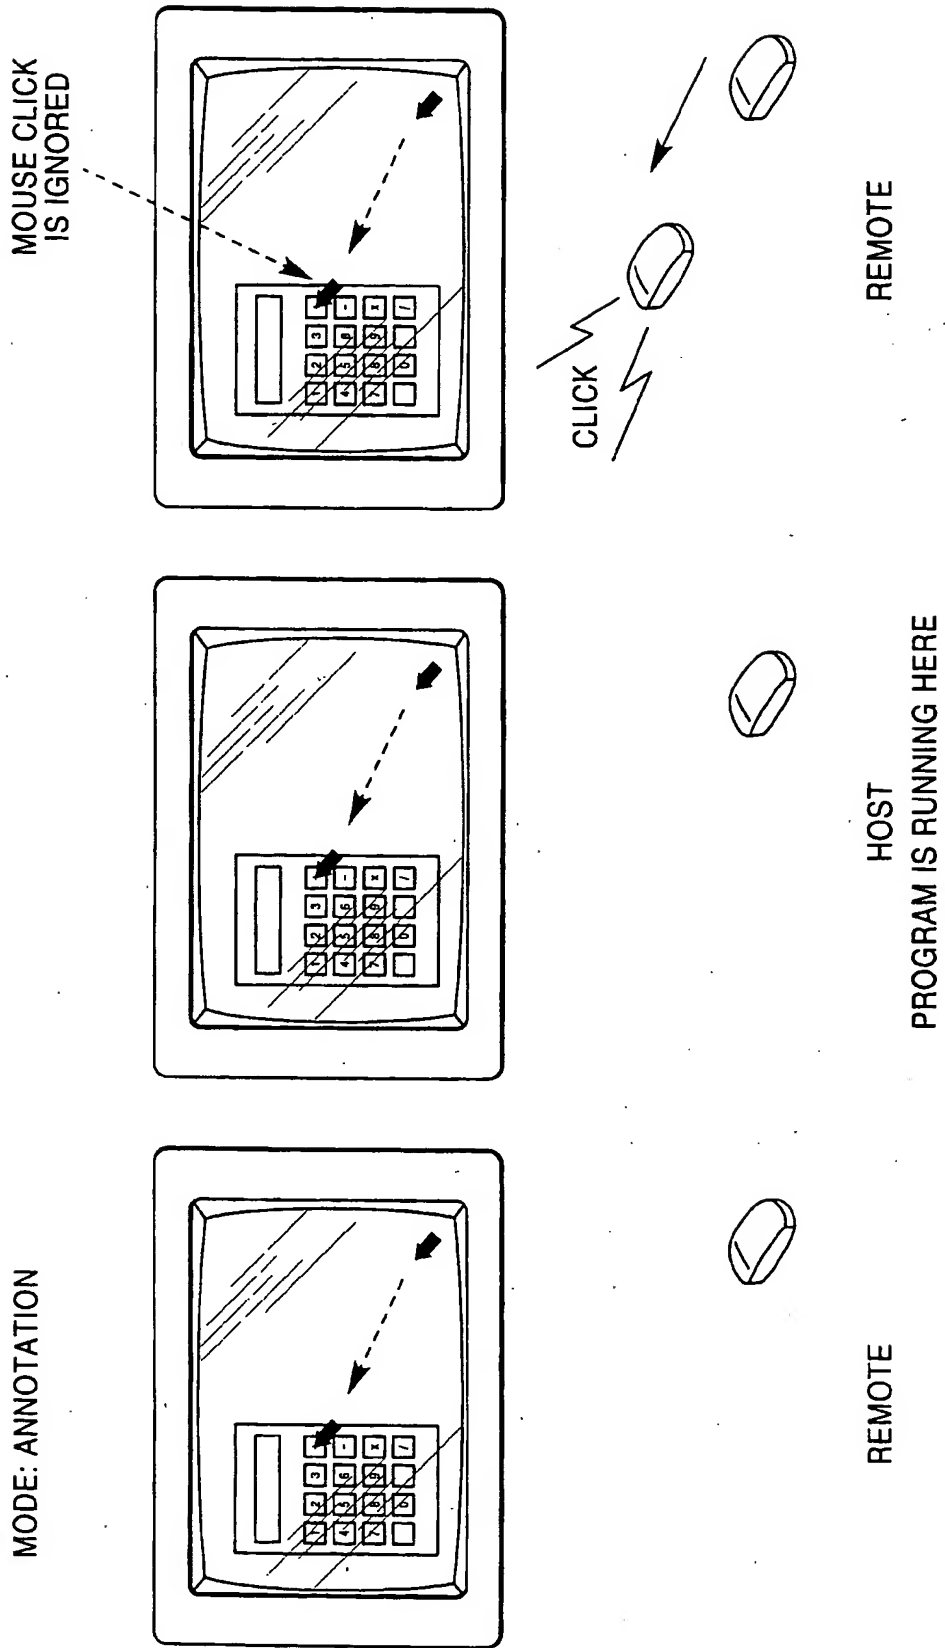

**FIG. 10**

MODE: ANNOTATION


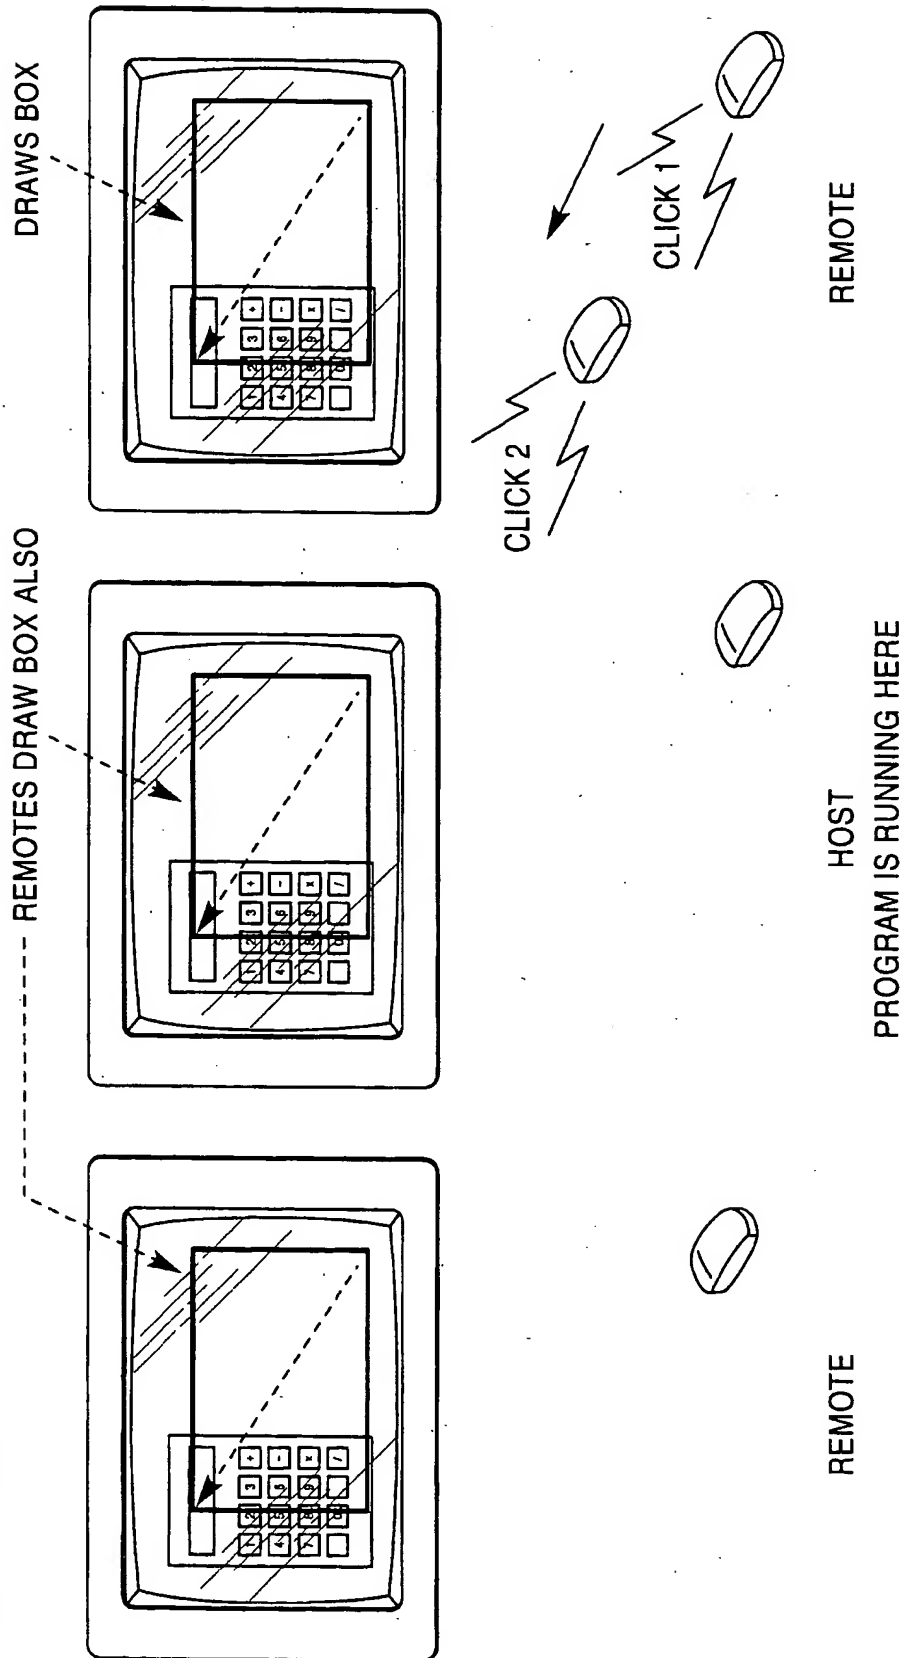


**FIG. 11**

MODE: APPLICATION

PROGRAM RUNNING ON HOST  
• BEHAVES AS THOUGH HOST CLICKED BUTTON

HOST SCREEN IS  
COPIED TO REMOTES

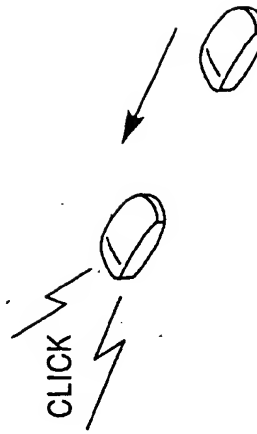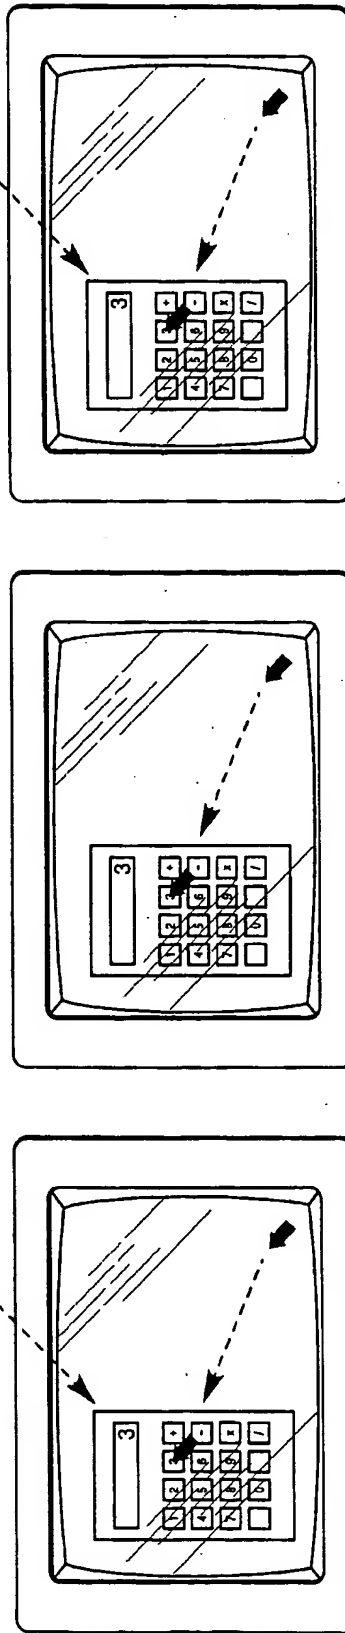

REMOTE

HOST





PROGRAM IS RUNNING HERE

REMOTE

**FIG. 12**

MODE: LOCAL ANNOTATION

MOUSE CLICK  
IS IGNORED

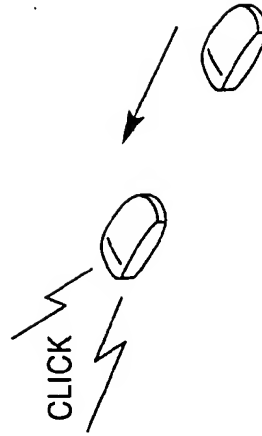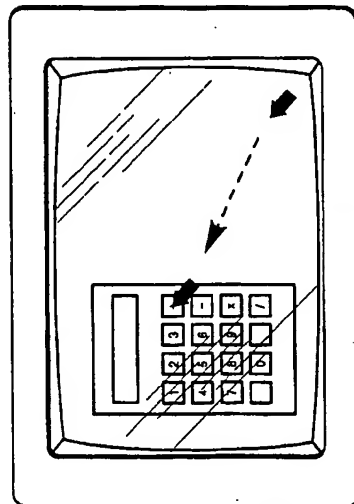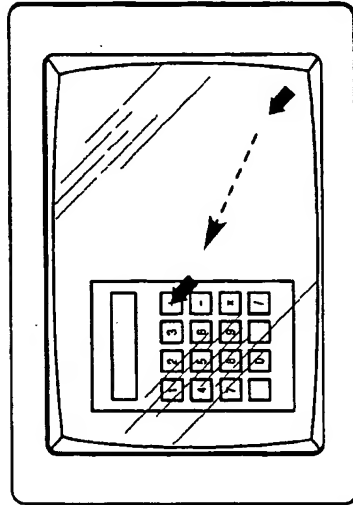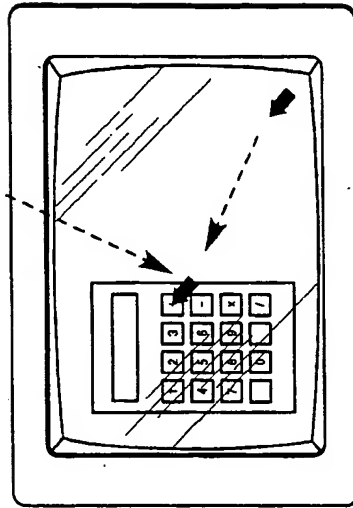

REMOTE




HOST  
PROGRAM IS RUNNING HERE



REMOTE


**FIG. 13**


MODE: LOCAL ANNOTATION

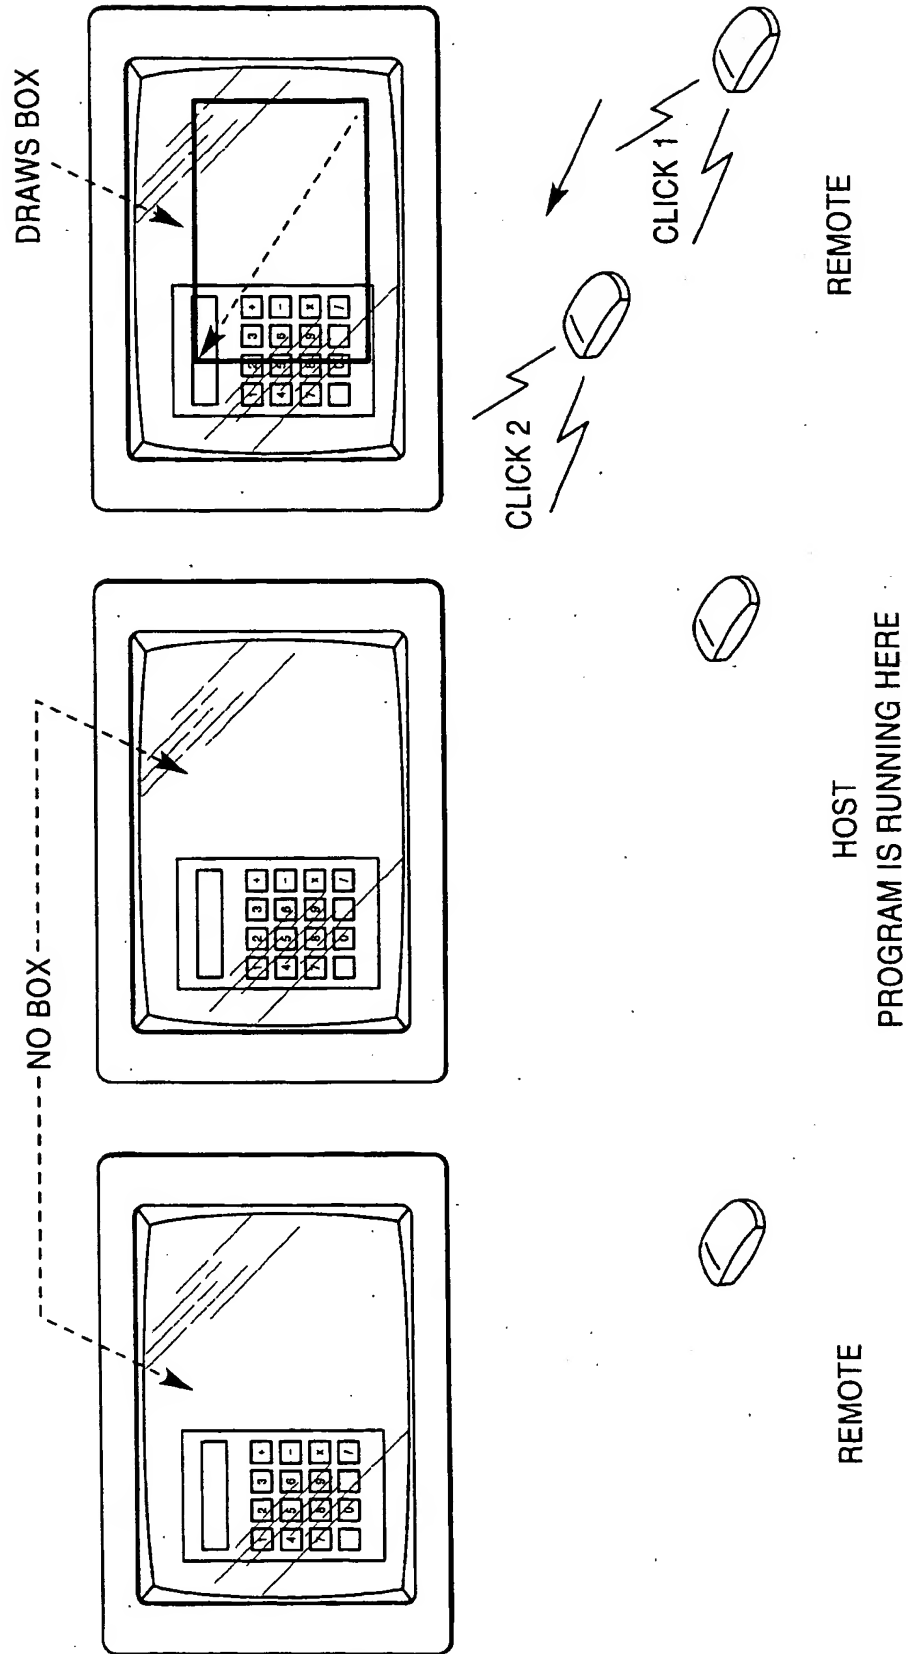


**FIG. 14**

MODE: VIEW

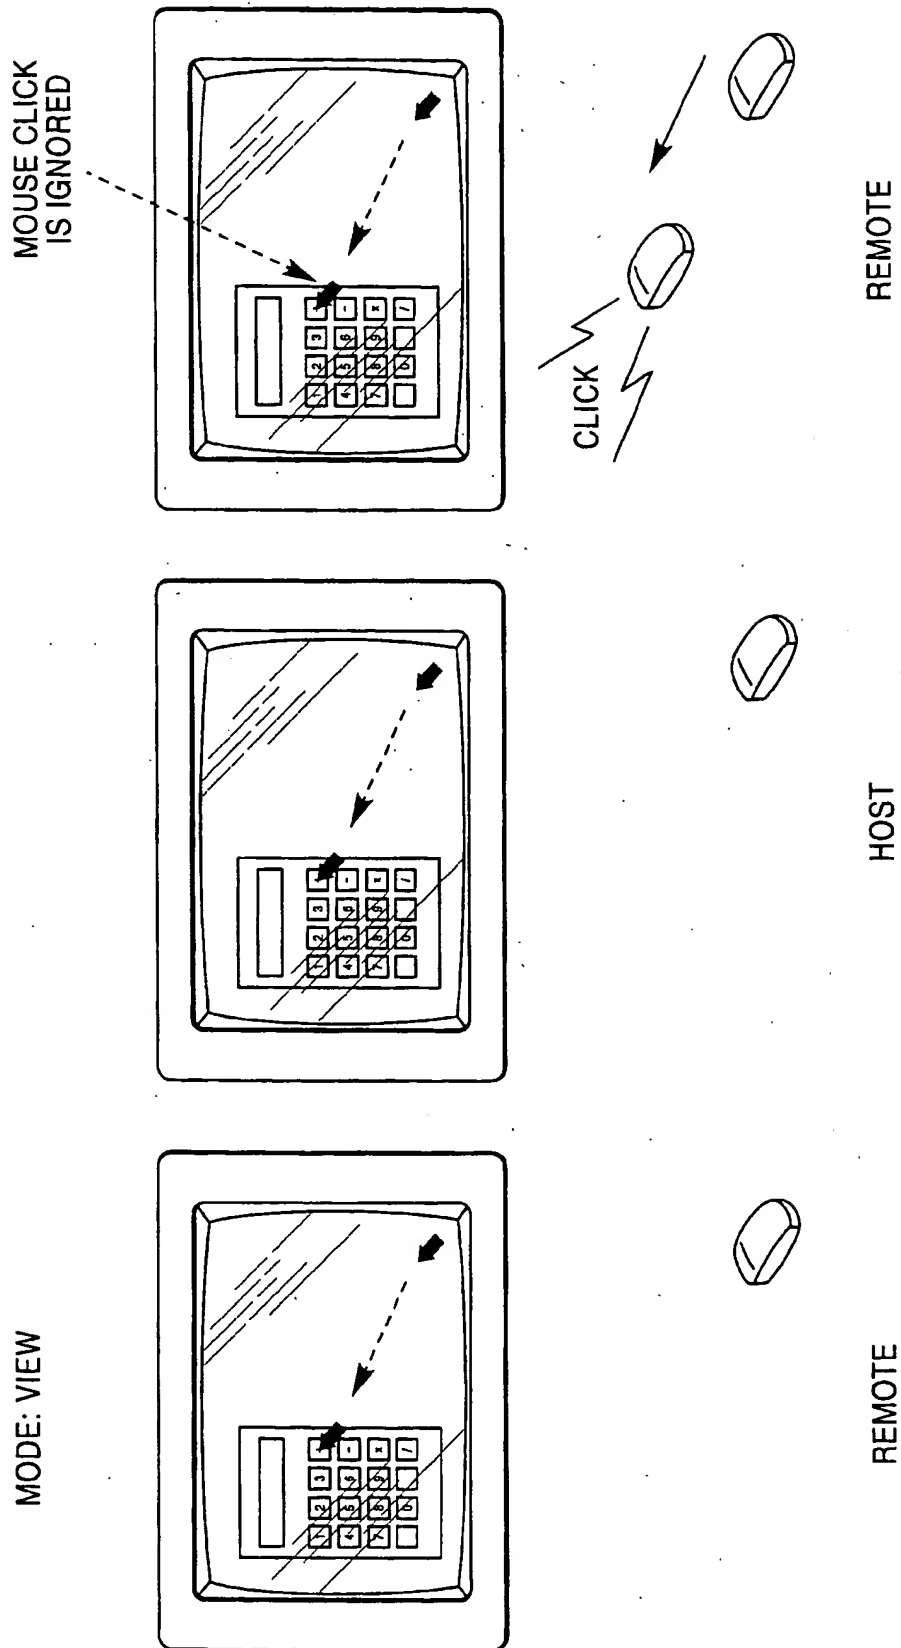


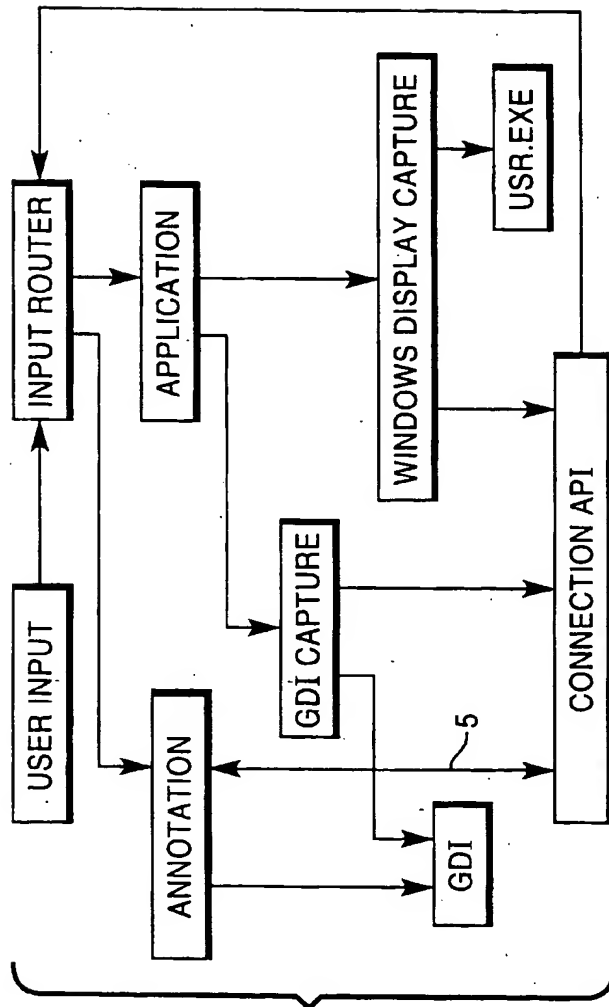

**FIG. 15**  
(HOST)

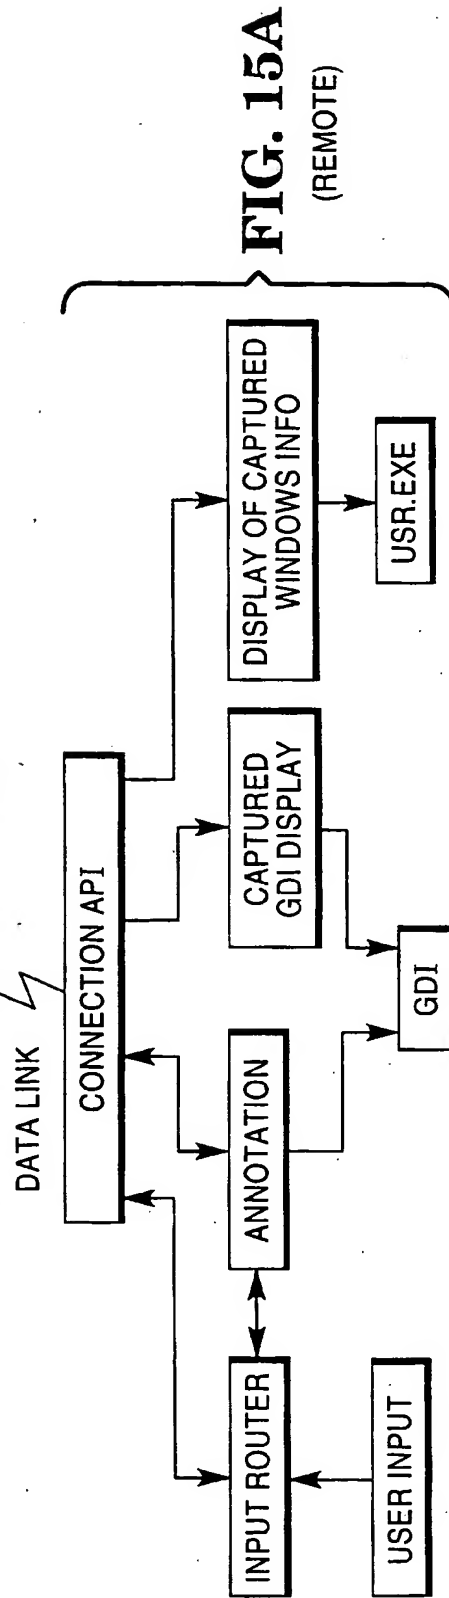

**FIG. 15A**  
(REMOTE)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 622 931 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
29.05.1996 Bulletin 1996/22

(51) Int Cl.<sup>6</sup>: H04L 29/06, H04L 12/18

(43) Date of publication A2:  
02.11.1994 Bulletin 1994/44

(21) Application number: 94301826.7

(22) Date of filing: 15.03.1994

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 19.03.1993 US 34313

(71) Applicant: AT&T GLOBAL INFORMATION  
SOLUTIONS INTERNATIONAL INC.  
Dayton, Ohio 45479 (US)

(72) Inventors:


- Schwartz, Krista S.  
Batavia, IL 60510 (US)

- Carleton, Allison A.  
Chicago, IL 60622 (US)
- FitzPatrick, Catherine M.  
Batavia, IL 60510 (US)
- Pommler, Theresa M.  
Westmont, IL 60559 (US)

(74) Representative: Robinson, Robert George  
International Patent Department  
NCR Limited  
915 High Road  
North Finchley  
London N12 8QJ (GB)

### (54) Display annotation for computer collaboration system

(57) In a computer system including a plurality of interlinked computers, annotations made on the display of one computer are replicated on the displays of the other computers. The annotations may be made in a shared window which is a display for an application program running on one of the computers.

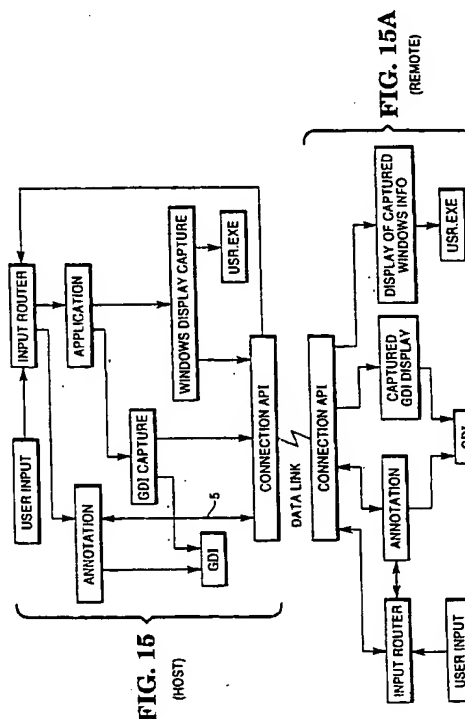

EP 0 622 931 A3





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 94 30 1826

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
X	WO-A-92 16895 (ECHELON CORP.) * page 1, line 7 - line 18 * * page 6, line 19 - page 9, line 19 * * page 31, line 12 - line 18 * * abstract * ---	1	H04L29/06 H04L12/18
X	BYTE, vol. 14, no. 1, January 1989 ST PETERBOROUGH US, pages 353-360, XP 000566012 D.POUNTAIN 'THE X WINDOW SYSTEM' * the whole document * ---	1-3,5,6	
A	US-A-5 119 319 (R.TANENBAUM) * abstract * * column 3, line 32 - column 6, line 61 * ---	1-5	
E	US-A-5 309 555 (A.S.AKINS ET AL) * column 3, line 47 - column 9, line 32 * * column 13, line 20 - line 32 * * column 16, line 3 - line 19 * * column 20, line 14 - column 22, line 34 * -----	1-5	
			TECHNICAL FIELDS SEARCHED (Int.Cl.5)
			G06F H04L
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 April 1996	Examiner Canosa Areste, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1501 (01.01.95) (P/0401)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☒ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**